

DIAMOND TOOLS GRINDING WHEELS MACHINES



Diamond Tools

Construction applications

Floor Saws




 **TOOLGAL**
Industrial Diamond Tools


Under cutting protection standards



C

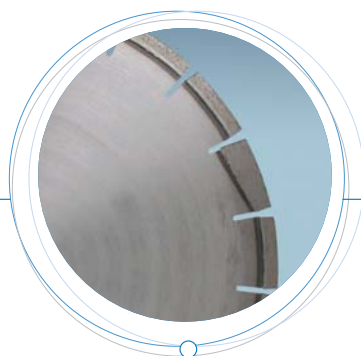


R

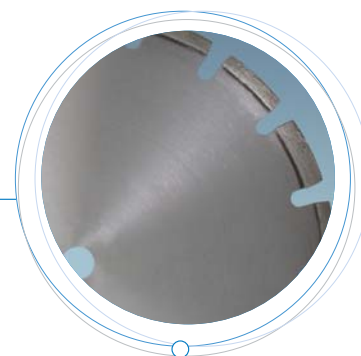


T


Main core types

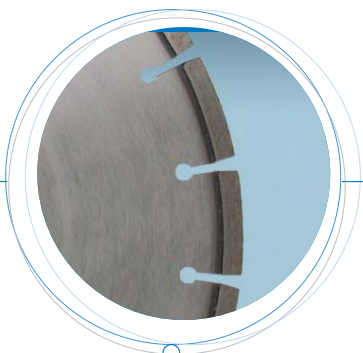

SK

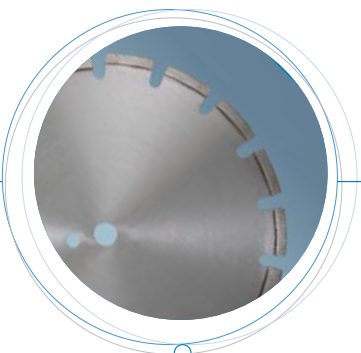

NS

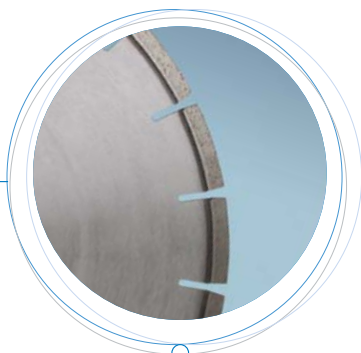

SS


Floor Saws

Floor sawing is one of Toolgal's top expertises. We have developed a variety of segment qualities for the wide range of asphalt, cured concrete, green concrete and masonry for 12" to 30" diameter blades.

A special developing process has been invested for the road cutting market with 30"-36" diameter application. Segment sizes are 40 mm long, .125 to .256 thicknesses and .275 to .375 heights.

Laser welded blades are standard for up to 24", though can be produced up to 36" if required. For all the uses, water-cooling is recommended.

Toolgal expert sales technical service team will choose for you the quality needed based on the machine, cutting characteristics and type of sawn material.

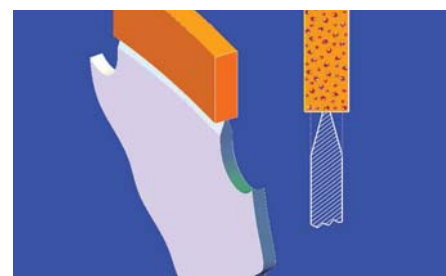

* Steel Core Types:

NS normal slot (which is wide slot with 40mm long teeth)

SS slim slot (which is narrow slot with 40mm long teeth)

SK slim slot with keyhole shape at end of gullet